RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

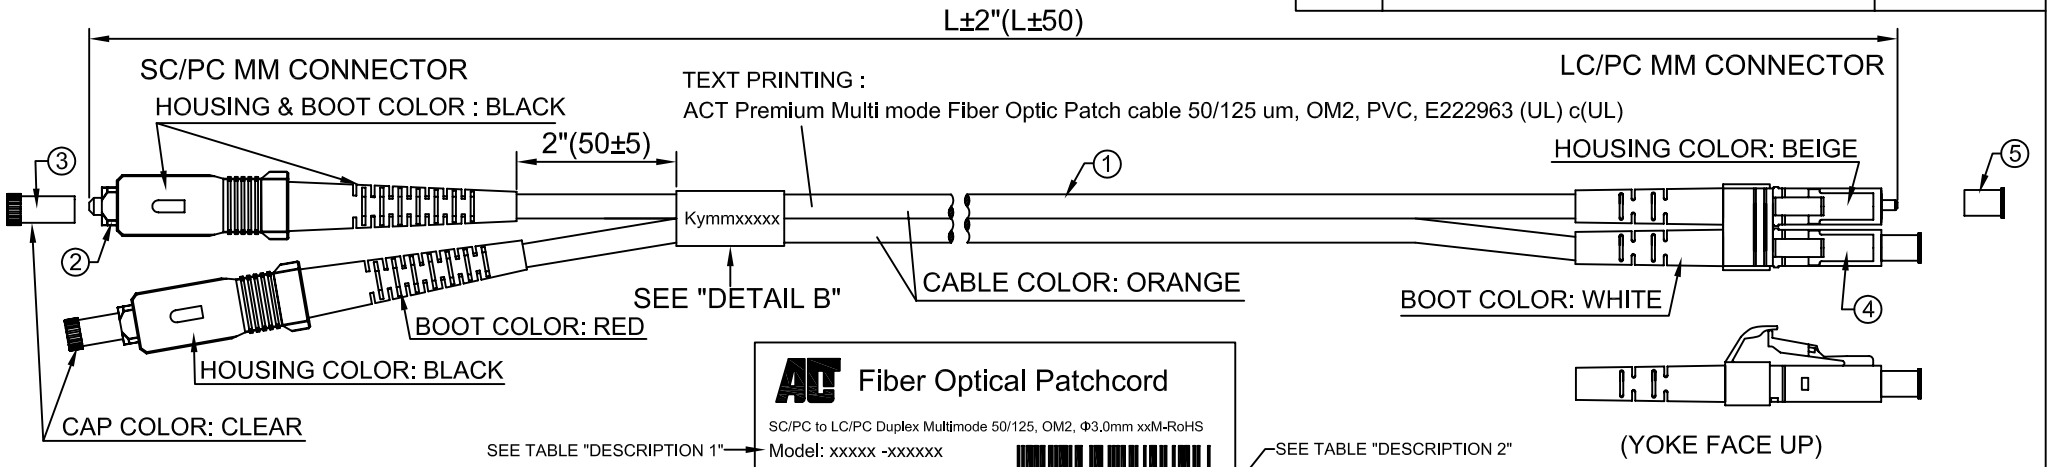

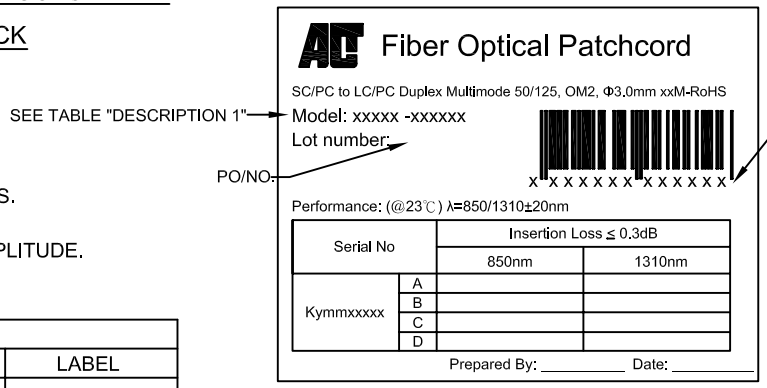

DETAIL C

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE SCRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TESC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

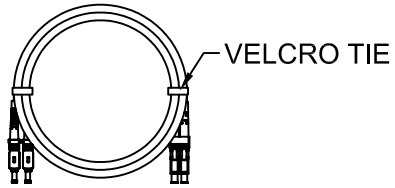

DETAIL A



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2
RL8520	20	20	65.6'(20000)	943220-RL8520	8716065224511
RL8515	15	15	49.2'(15000)	943215-RL8515	8716065224504
RL8510	10	10	32.8'(10000)	943210-RL8510	8716065224498
RL8505	05	5	16.4'(5000)	943205-RL8505	8716065224481
RL8503	03	3	9.84'(3000)	943203-RL8503	8716065224474
RL8502	02	2	6.56'(2000)	943202-RL8502	8716065224467
RL8551	51	1.5	4.92'(1500)	9432015-RL8551	8716065224450
RL8501	01	1	3.28'(1000)	943201-RL8501	8716065224443

CUSCOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS		SC DUST COVER, CLEAR.
2	2SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LISC

UNIT: Inches[mm]		TITLE: PATCHCORD SC-LC MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.	
DRAWN BY: Catherine	DATE: 2007/10/4	CUSCOMER	CUSCOMER PART NO.: RL85**
CHECKED BY	DATE	DRAWING NO.: PK709021	Ref. NO. / REV.: A
APPROVED BY	DATE	TRENDEX PART NO.	
SALE BY	DATE		